

The Gripple APEX Anchor creates a secure, fixed anchoring point below the ground. No pre-digging or ground preparation is required, dramatically reducing installation time.

## FEATURES / BENEFITS


- **Robust** – Designed for drive efficiency and maximum load capacity
- **Undisruptive** – Streamlined profile for minimal soil disturbance
- **Versatile** – Suitable for a variety of soil types and environmental conditions
- **Quick** – No requirement for pre-digging or ground preparation ensures fast installation and significant time and labour savings
- **Durable** – Three tendon types for maximum corrosion resistance



## SPECIFICATION

Product	Tendon Type	Tendon Length
APEX 3	Wire Rope (3.00 mm)	0.9 m
		1.5 m
	Rod Tendon (6.00 mm)	0.9 m
	Fibre Tendon (4.77 mm)	0.9 m
APEX 4		1.5 m
	Wire Rope (4.00 mm)	0.9 m
		1.5 m
	Rod Tendon (6.00 mm)	0.9 m
APEX 5	Fibre Tendon (4.77 mm)	0.9 m
		1.5 m
	Wire Rope (8.00 mm)	1.6 m

## INSTALLATION

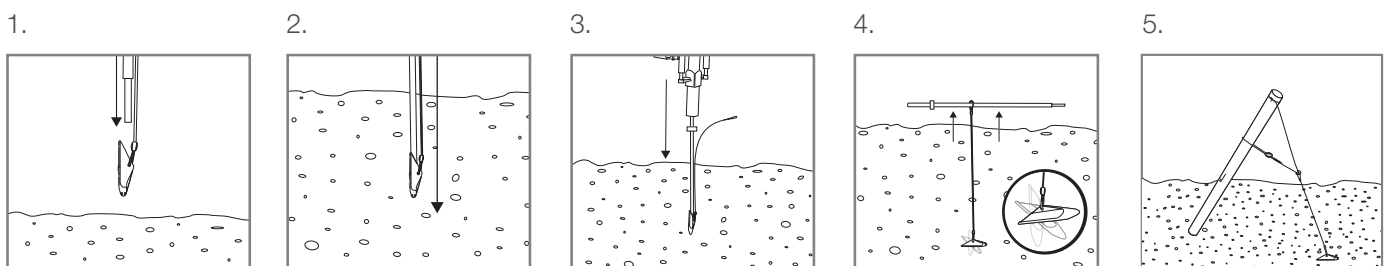

Longevity & suitability depends on a variety of factors, ask Gripple Technical Services for details.  
PP materials are UV protected, designed for a long life. \*Rod Tendon Anchor - Hot-Dipped Coating 140g/m<sup>2</sup> (19.6 microns)

## TIPS

- Always drive the APEX Anchor fully into the ground, to a depth of at least 0.9 m
- For even quicker installation of APEX Anchors, use the Gripple Petrol Driver (GPD)
- When using INOX components within a structure always use the APEX Anchors with a fibre tendon to maximise corrosion resistance

## TENDON TYPES

